





MOTION XT° | MOTION® SERIES OVERVIEW












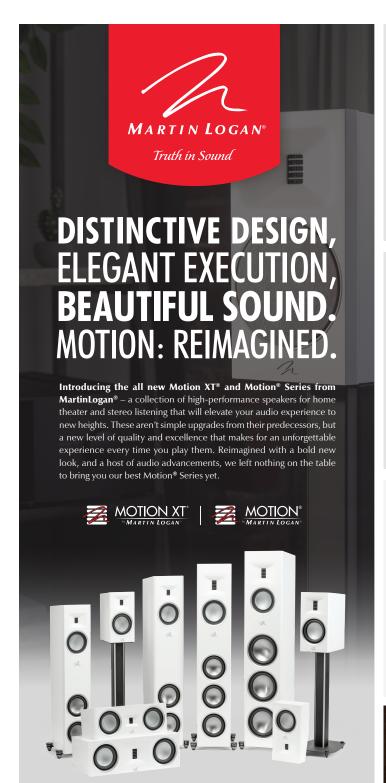



High-Performance Folded Motion® Floorstanding Speaker

Our Ultimate Performance Motion XT® tower sets a new bar for performance in its class and beyond.

R121 995





F100

High-Performance Folded Motion® Floorstanding Speaker

Step up XT series performance upgrades with triple bass drivers makes for a compelling option for those looking for a high performance tower speaker.

R99 995





C100

High-Performance Folded Motion® Center Channel Speaker

The ideal performance focused Center Channel for any Motion® home theater system.

R32 995





B100

High-Performance Folded Motion® Bookshelf Speaker

Our best bookshelf speaker for those wanting maximum performance without moving to a tower speaker.

R34 995





F20

High-Performance Folded Motion® Floorstanding Speaker

The flagship of the Motion® range delivers even more performance while keeping a very manageable footprint.

R76 995





F10

High-Performance Folded Motion® Floorstanding Speaker

Our most compact tower model, F10 absolutely defies expectations with its huge performance and compact size.

R54 995





C10

High-Performance Folded Motion® Center Channel Speaker

The ideal compact Center Channel option to deliver crystal clear dialogue perfectly complimenting your Motion® home theater system.

R21 995





B10

High-Performance Folded Motion® Bookshelf Speaker

Redefining what to expect from a compact bookshelf speaker.

R25 995 Stands R14 595





MP10

High-Performance Folded Motion® Multi-Purpose Speaker

Its incredible versatility delivers amazing performance wherever you need it.

R10 995 each





3 FINISHES AVAILABLE






Satin White









MOTION®

WMARTIN LOGAN®

F200	F100	C100	B100	F20	F10	C10	B10	MP10
Floorstanding	Floorstanding	Center Channel	Bookshelf	Floorstanding	Floorstanding	Center Channel	Bookshelf	Multi-Purpose
27 Hz - 25k Hz	31 Hz - 25 kHz	42 Hz - 25 kHz	45 Hz - 25 kHz	35 Hz - 25kHz	38 Hz - 25 kHz	63 Hz - 25 kHz	56 Hz - 25 kHz	81 Hz - 25kHz
45° x 90°	45° x 90°	45° x 90°	45° x 90°	90° x 90°	90° x 90°	90° x 90°	90° x 90°	90° x 90°
92 dB	92 dB	93 dB	93 dB	92 dB	92 dB	93 dB	92 dB	92 dB
4 ohms	4 ohms	5 ohms	4 ohms	4 ohms	4 ohms	4 ohms	5 ohms	5 ohms
300Hz, 2600Hz (3-way)	280 Hz, 2600 Hz (3-way)	1,300 Hz, 2,500 Hz (2.5-way)	2,600 Hz (2-way)	230 Hz, 2,600 Hz (3-way)	280 Hz, 3,000 Hz (3-way)	1000 Hz, 2,000 Hz (2.5-way)	2,370 Hz (2-way)	2,100 Hz (2-way)
1.25" x 2.4" (3.2 x 6.1cm) Gen2 Obsidion Folded Motion XT® Tweeter with 12.4 in² (79.8 cm²) diaphragm	1.25" x 2.4" (3.2 x 6.1cm) Gen2 Obsidian Folded Motion XT® Tweeter with 12.4 in² (79.8 cm²) diaphragm	1.25" x 2.4" (3.2 x 6.1cm) Gen2 Obsidion Folded Motion XT® Tweeter with 12.4 in ² (79.8 cm ²) diaphragm	1.25" x 2.4" (3.2 x 6.1cm) Gen2 Obsidian Folded Motion XT® Tweeter with 12.4 in² (79.8 cm²) diaphragm	1" x 1.4" (2.6 x 3.6cm) Gen2 Obsidion Folded Motion® Tweeter with 9.2 in² (59.4 cm²) diaphragm	1" x 1.4" (2.6 x 3.6cm) Gen2 Obsidian Folded Motion® Tweeter with 9.2 in² (59.4 cm²) diophragm	1" x 1.4" (2.6 x 3.6cm) Gen2 Obsidian Folded Motion® Tweeter with 9.2 in² (59.4 cm²) diaphragm	1" x 1.4" (2.6 x 3.6cm) Gen2 Obsidion Folded Motion® Tweeter with 9.2 in² (59.4 cm²) diaphragm	1" x 1.4" (2.6 x 3.6cm) Gen2 Obsidian Folded Motion® Tweeter with 9.2 in² (59.4 cm²) diaphragm
6.5" (16.5cm) Nomex Reinforced Kevlar® cone with cast aluminum basket. Non-resonant sealed chamber format. Unibody cone construction.	6.5" (16.5cm) Nomex Reinforced Kevlar® cone with cast aluminum basket. Non-resonant sealed chamber format. Unibody cone construction.	2x 6.5" (16.5cm) Nomex Reinforced Kevlar® cones with cost aluminum baskets. Non-resonant asymmetrical chamber format. Unibody cone construction. Anti-lobing 2.5-way crossover design.	6.5" (16.5cm) Nomex Reinforced Kevlar® cone with cast aluminum basket. Non-resonant asymmetrical chamber format. Unibody cone construction.	5.5" (14cm) Woven Fiberglass cone with cast polymer basket. Non- resonant sealed chamber format. Unibody cone construction.	5.5" (14cm) Woven Fiberglass cone with cast polymer basket. Non- resonant sealed chamber format. Unibody cone construction.	2x 5.5" (14cm) Woven Fiberglass cones with cast polymer baskets. Non- resonant sealed chamber format. Unibody cone construction. Anti-lobing 2.5-way crossover design.	5.5" (14cm) Woven Fiberglass cone with cast polymer basket. Unibody cone construction.	5.5" (14cm) Woven Fiberglass cone with cast polymer basket. Unibody cone construction.
3x 8" (20.3cm) aluminum cones with cast aluminum baskets. Non-resonant asymmetrical chamber format. Unibody cone construction	3x 6.5" (16.5cm) aluminum cones with cast aluminum baskets. Non-resonant asymmetrical chamber format. Unibody cone construction.	-	_	2x 6.5" (16.5cm) aluminum cones with cast polymer baskets. Non-resonant asymmetrical chamber format. Unibody cone construction.	2x 5.5" (14cm) aluminum cones with cast polymer baskets. Non-resonant asymmetrical chamber format. Unibody cone construction.	_	_	_
Bottom Ported	Bottom Ported	Rear Ported	Rear Ported	Bottom Ported	Bottom Ported	Rear Ported	Rear Ported	Stealth Rear Ported
20 - 600 watts	20 - 450 watts	20 - 300 watts	20 - 250 watts	20 - 300 watts	20 - 250 watts	20 - 200 watts	20 - 200 watts	20 - 200 watts
Custom bi-amp/bi-wire capable 5-way binding posts	Custom bi-amp/bi-wire capable 5-way binding posts	Custom bi-amp/bi-wire capable 5-way binding posts	Custom bi-amp/bi-wire capable 5-way binding posts	Custom bi-amp/bi-wire capable 5-way binding posts	Custom bi-amp/bi-wire capable 5-way binding posts	Custom 5-way binding posts	Custom 5-way binding posts	Custom 5-way binding posts
86lbs / 39kg	76lbs / 34.5kg	34lbs / 15.4kg	20.5lbs / 9.3kg	60lbs / 27.2kg	50.5lbs / 22.9kg	23.5lbs / 10.7kg	14.5lbs / 6.6kg	9.7lbs / 4.4kg
50-3/4" x 13-3/4" x 16-1/2" 14.6cm x 34.9cm x 41.9cm	47-3/4" x 12-1/2" x 15" 121.3cm x 31.75cm x 38.1cm	8" x 24" x 14-1/2" 20.3cm x 61cm x 36.8cm	14-1/2" x 8" x 12-1/2" 36.8cm x 20.3cm x 31.8cm	44·3/4" x 11·3/4" x 14·1/4" 112.7cm x 29.8cm x 36.2cm	38-1/4" x 11-1/4" x 13-1/4" 97.1cm x 28.6cm x 33.6cm	7-1/4" x 19" x 11-1/2" 18.4cm x 48.3cm x 29.3cm	12-1/2" x 7" x 9-3/4" 31.8cm x 17.8cm x 24.8cm	14" x 8" x 5" 35.6cm x 20.3cm x 12.7cm
Gloss Black, Walnut, and	Gloss Black, Walnut, and	Gloss Black, Walnut, and	Gloss Black, Walnut, and	Gloss Black, Walnut, and	Gloss Black, Walnut, and	Gloss Black, Walnut, and	Gloss Black, Walnut, and	Gloss Black, Walnut, and
	Floorstanding 27 Hz - 25k Hz 45° x 90° 92 dB 4 ohms 300Hz, 2600Hz (3-way) 1.25" x 2.4" (3.2 x 6.1cm) Gen2 Obsidian Folded Motion XT® Tweeter with 12.4 in² (79.8 cm²) diaphragm 6.5" (16.5cm) Nomex Reinforced Kevlar® cone with cast aluminum basket. Non-resonant sealed chamber format. Unibody cone construction. 3x 8" (20.3cm) aluminum cones with cast aluminum baskets. Non-resonant asymmetrical chamber format. Unibody cone construction Bottom Ported 20 - 600 watts Custom bi-amp/bi-wire capable 5-way binding posts 86lbs / 39kg 50-3/4" x 13-3/4" x 16-1/2" 14.6cm x 34.9cm x 41.9cm	Floorstanding 27 Hz - 25k Hz 31 Hz - 25 kHz 45° x 90° 45° x 90° 92 dB 92 dB 4 ohms 4 ohms 300Hz, 2600Hz (3-way) 1.25" x 2.4" (3.2 x 6.1cm) Gen2 Obsidian Folded Motion XT® Tweeter with 12.4 in² (79.8 cm²) diaphragm 6.5" (16.5cm) Nomex Reinforced Kevlar® cone with cast aluminum basket. Non-resonant sealed chamber format. Unibody cone construction. 3x 8" (20.3cm) aluminum cones with cast aluminum baskets. Non-resonant asymmetrical chamber format. Unibody cone construction 3x 6.5" (16.5cm) aluminum cones with cast aluminum baskets. Non-resonant asymmetrical chamber format. Unibody cone construction 3x 6.5" (16.5cm) aluminum cones with cast aluminum baskets. Non-resonant asymmetrical chamber format. Unibody cone construction 3x 6.5" (16.5cm) aluminum cones with cast aluminum baskets. Non-resonant asymmetrical chamber format. Unibody cone construction. 3x 6.5" (16.5cm) aluminum cones with cast aluminum baskets. Non-resonant asymmetrical chamber format. Unibody cone construction. 3x 6.5" (16.5cm) aluminum cones with cast aluminum baskets. Non-resonant asymmetrical chamber format. Unibody cone construction. Custom bi-amp/bi-wire capable 5-way binding posts 6blbs / 39kg 76lbs / 34.5kg 50-3/4" x 13-3/4" x 16-1/2" 14.6cm x 34.9cm x 41.9cm 77 lbs / 34.5kg	Floorstanding Floorstanding Center Channel	Floorstanding	Floorstanding Floorstanding Center Channel Bookshelf Floorstanding	Floorstanding Floorstandin	Floorstanding	Procedurating Floor Standing Canter Clummal Bookshell Floor Standing Canter Clummal Bookshell